


Abdeck- und Einfassungsprofil

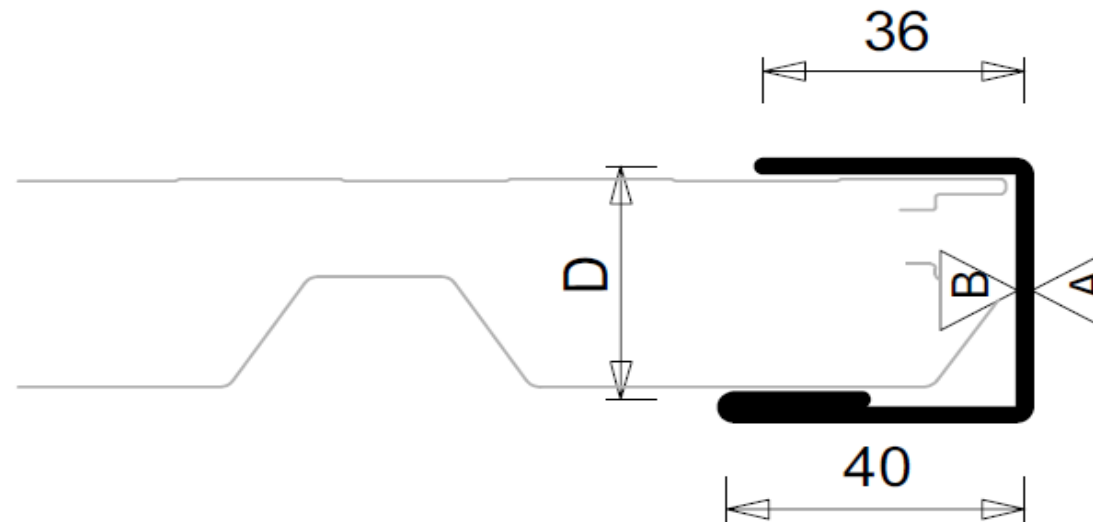

Abdeck- und Einfassprofil

| | |
|---------------|------------------------|
| Materialdicke | 0,75 mm |
| Baulänge | 6000 mm (max. 8000 mm) |

| Bestell-Nr. | Maß C mm | Maß D mm | Abwick- lung mm | Gewicht kg/m | geeignet für | |
|-------------|----------------|----------------|-----------------------|-----------------|------------------|--------------------|
| | | | | | Produkt | Elementdicke mm |
| K40-071 | 40 | 41 | 137 | 0,8 | Sandwichelemente | 40 |
| K40-072 | 40 | 61 | 154 | 0,9 | | 60 |
| K40-073 | 40 | 67 | 176 | 1,1 | | 66 |
| K40-074 | 40 | 81 | 176 | 1,1 | | 80 |
| K40-075 | 40 | 97 | 205 | 1,2 | | 96 |
| K40-076 | 40 | 101 | 205 | 1,2 | | 100 |
| K40-077 | 35 | 121 | 205 | 1,2 | | 120 |



Hesse

Holzbearbeitung &
Trapezblechhandel GmbH

Gundringhausen 23

59969 Hallenberg

Stand 2011